

COMPACT POWERHOUSE

Superflow combines all the advantages of a boiler and cylinder in one small wall-hung unit. It may be compact, but don't be deceived, this super-efficient water heater packs a punch, delivering constant hot water on demand from the kitchen and utility room to the bathroom and ensuite – all at the same time.

Space saving is just one of its benefits because, like all Intergas boilers, it features our patented aluminium and copper heat exchanger which guarantees the most effective heat transfer, while reducing heat loss to the absolute minimum. Intelligent design and state-of-the-art electronics mean Superflow is also highly responsive and, because it's manufactured using the most robust materials, it's highly reliable too.

The range features two models, the Superflow 45 and the Superflow 60. The Superflow 60 delivers a flow rate of up to 25 liters per minute and both models are equipped with an energy efficiency rating of A. The illuminated touch screen display makes Superflow easy to use and control.

If you'd like to know more about Superflow, our compact powerhouse, please call us on 01527 888000 or email sales@intergas-heating.co.uk.

SUPERFLOW



INTERGAS®
HEATING SOLUTIONS



SUPERFLOW
*Instantaneous hot water.
On demand. On tap.
And on and on.*

Intergas Heating Ltd
Unit 2, Easter Park
Worcester Road
Kidderminster
DY11 7AR
01527 888000
info@intergas-heating.co.uk

INTERGASHEATING.CO.UK

The instantaneous water heater that packs a punch.

213529 Straightforward ITG Superflow Bro 2024/05/03 12:15:36

Technical Specifications

SUPERFLOW		45	60
Rated power (output)	kW	45	60
Capacity profile tap water		XXL	XXL
Energy efficiency class for water heating		A	A

Domestic Hot Water

Nom. load upper value	kW	6.8 - 47.2	8.3 - 58.3
Nom. load lower value	kW	6.1 - 42.5	7.5 - 52.6
Nom. output	kW	41.9	52.3
Tap threshold	l/min	1.5	1.5
Domestic hot water flow 40 °C	l/min	20	25
Domestic hot water flow 60 °C	l/min	12	15
Domestic hot water temperature (standard setting)	°C	60	60
Domestic hot water temperature range	°C	40 - 65	40 - 65

Type Designation

Sound power level	L_{WA}	dB	62	60
Declared load profile DHW	-	-	XXL	XXL
Domestic hot water efficiency	η_{WH}	%	85	86
Annual electricity use	AEC	kWh	18	13
Annual fuel use	AFC	GJ	23	22


Overall Dimensions and Weight

Height	mm	755	755
Width	mm	400	450
Depth	mm	260	277
Weight	kg	27.5	30

SUPERFLOW

Wireless Cascade Feature

Superflow now includes an innovative wireless cascade feature which allows up to eight units to operate together where a single Superflow unit is not large enough. This wireless cascade system is easy to setup and flexible enough for the most demanding applications.

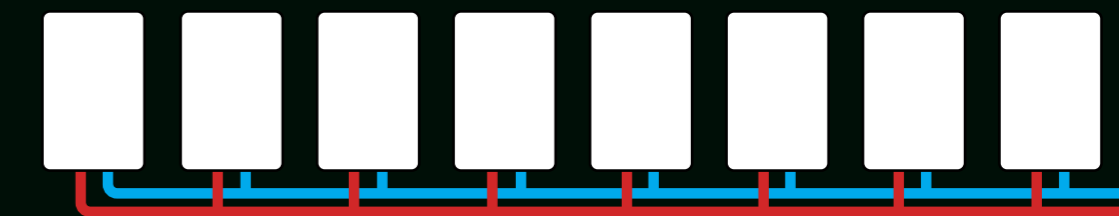

Quality, technology and intelligent design.